


Access door

KCRU



Dimensions

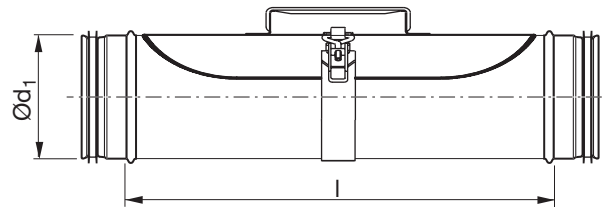


Description

Access door which complies with the requirements for access doors in Swedish Standard SS 2645.

The door is held in place by a tension strap with adjustable eccentric lock. This offers a quick and simple opening and closing. A built-in handle also aids handling.

Ød ₁ nom	l mm	m kg
100	480	1,06
125	480	1,30
160	480	1,80
200	480	2,00
250	480	2,92
315	480	4,10
400	480	5,51

Ordering example



- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18