

Technical Data Sheet

CODE 11648

MICRO 80 T

Centrifugal duct fans



Certifications




IMQ Performance



TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Airflow at 1st speed (l/s)	17
Insulation class	II°	Airflow at 1st speed (m³/h)	60
IP	X4	Max airflow at Max speed (l/s)	24
Max absorbed current at Max speed (A)	0,13	Max airflow at Max speed (m³/h)	85
Max absorbed current at Min speed (A)	0,10	Max pressure at Max speed (mmH2O)	27
Max absorbed power (W)	27	Max pressure at Max speed (Pa)	265
Max absorbed power at Max speed (W)	27	Max RPM	1580
Max ambient temperature for continuous operation (°C)	50	Min RPM	1150
Nominal diameter (mm)	80	Pressure at 1st speed (mmH2O)	22
∅ Discharge hole (mm)	73,5	Pressure at 1st speed (Pa)	216
Power absorbed at 1st speed (W)	19	Sound pressure at 3 m - min speed Lp [dB (A)] 3m - min speed	28,7
Voltage (V)	220-240	Sound pressure at 3m at Max speed Lp [dB (A)]	37
Weight (Kg)	1,81	Sound pressure in free air conditions [dB(A)] 3m	28,7

DIMENSIONS

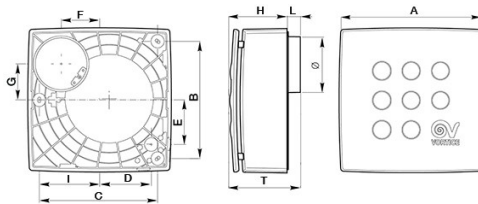

Size A (mm)	239
Size B (mm)	195
Size C (mm)	197
Size D (mm)	85
Size E (mm)	74
Size F (mm)	64
Size G (mm)	60
Size I (mm)	100
Size L (mm)	20
Size T (mm)	117

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
 After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND
 Sales Dept:
sales@vortice.ltd.uk
 Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
 After Sales:
after-sales@vortice-italy.com

Technical Data Sheet

CODE 11648

MICRO 80 T

Centrifugal duct fans



DESCRIPTION

- Material: white ABS plastic
 - Capacitor start 2-speed induction motor coupled to a forward bladed centrifugal impeller. Equipped with thermal overload cutout and self-lubricating bushings.
 - Nominal diameter 80 mm.
 - Minimum air flow 60 m³/h
- Maximum air flow: 85 m³/h
- Equipped with electronic timer designed to shut off the motor automatically after a set interval, selectable during installation in the range 3'-20' (default setting 3').
 - IMQ SAFETY and IMQ PERFORMANCE certifications.

CURVES

□

ACCESSORIES



DEVIATORE DI FLUSSO M 10/4

Code 22310

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk