


## Flexible hose

## THTR

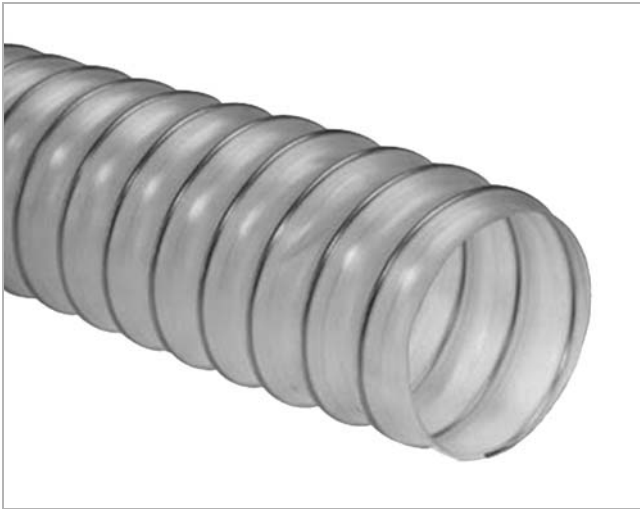

## Description


Light, flexible hose built on a bright steel spiral. Transparent with a light bluish tone.

Material polyester – polyurethane

Temperature range -40 to +100 °C

Fits standard fitting dimensions.

## Dimensions

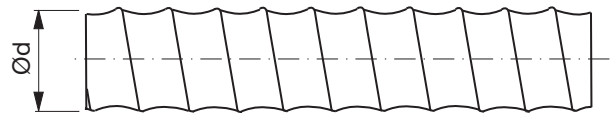

| Ød<br>mm | Min.<br>bending<br>radius<br>mm | Max. per-<br>missible<br>negative<br>pressure<br>kPa | l<br>mm | m <sub>l</sub><br>kg/m |
|----------|---------------------------------|--|---------|------------------------|
| 80       | 80                              | 14,5   | 6000    | 0,50                   |
| 100      | 100                             | 12,0   | 6000    | 0,60                   |
| 125      | 125                             | 10,0   | 6000    | 0,70                   |
| 140      | 140                             | 8,0  | 6000    | 0,80                   |
| 150      | 150                             | 7,8  | 6000    | 0,90                   |
| 160      | 160                             | 7,5  | 6000    | 0,90                   |
| 180      | 180                             | 6,5  | 6000    | 1,00                   |
| 200      | 200                             | 6,2  | 6000    | 1,10                   |
| 250      | 250                             | 5,0  | 6000    | 1,40                   |

## Ordering example

|              |      |     |
|--------------|------|-----|
| Product      | THTR | 160 |
| Dimension Ød |      |     |